




- Dimension (W x L x H): 100 x 180 x 40 mm
- Maximum Output Power: 350W



Features and Benefits:

- Platinum Efficiency
- 17ms Hold up time

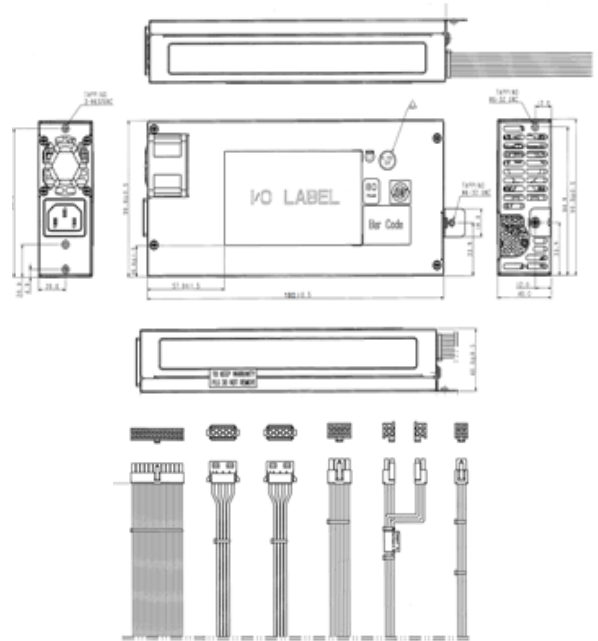

INPUT CHARACTERISTICS

RATED VOLTAGE / CURRENT	100-240Vac / 5-2.5A
RATED FREQUENCY	50-60HZ
INRUSH CURRENT	Less than 30A
POWER FACTOR	0.99 (Typical)
INLET CONNECTOR	IEC 60320 C14

GENERAL SPECIFICATIONS

MTBF	>200,000hours, 35 °C
REMOTE CONTROL	PSON signal is to remote turn ON/OFF the power supply
PROTECTION	OCP, OVP, Short Circuit, Over Temperature, Input Under Voltage

DC OUTPUT CHARACTERISTICS

OUTPUT CURRENT	Voltage	Min.	Max
	+3.3V	0.2A	12A
	+5V	0.2A	15A
	+12V	0.5A	29A
	-12V	0A	0.2A
	+5Vsb	0A	3A
	Maximum total power is 350W. Combined continuous power of 5V and 3.3V is 80W max.		
EFFICIENCY	80Plus Platinum (92%+) certified		
REGULATION	+3.3V/+5V/+12V/+5Vsb: +/-5% -12V: +/-10%		
RIPPLE & NOISE	+3.3V/+5V/+5Vsb: 50mV +12V/-12V: 120mV		
OUTPUT CONNECTOR	24pin/8pin/4+4pin/HDD		
HOLD UP TIME	PWOK 17ms at 75% of max Loading Vout 18ms at 75% of max loading		

REGULATORY

SAFETY COMPLIANCE	UL60950-1/CSA 60950-1 EN60950-1 IEC60950-1 CB Report CE Low Voltage Directive BSMI CCC (5000M)
EMC	FCC/CISPR Class B

ENVIRONMENTAL SPECIFICATIONS

AMBIENT TEMPERATURE	Operating: 0 to 50 °C Non-Operating: -10 to 70 °C
OPERATING ALTITUDE	Operating: to 5000m Non-Operating: to 10580m
RELATIVE HUMIDITY	Operating: 20% to 90% (non-condensing) Non-Operating: 5% to 95% (non-condensing)

Disclaimer: Specification is subject to change without prior notice