





- Dimension (W x L x H): 76 x 360 x 40 mm
- Maximum Output Power: 710W



Features and Benefits:

- Wide Range DC Input
- High Power Density
- Redundant and Hot-swappable

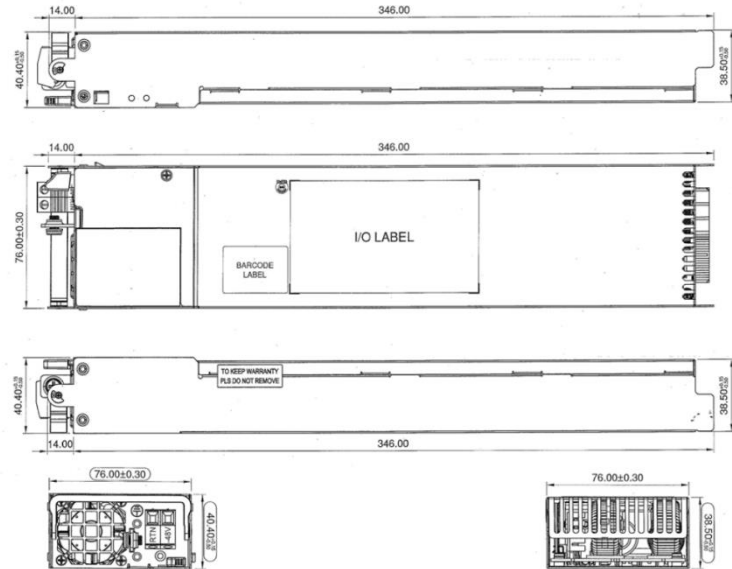

Terminal Block Type Input Connector and Wiring Diagram

INPUT CHARACTERISTICS

RATED VOLTAGE / CURRENT	-36 to -75Vdc / 34 - 11A
INRUSH CURRENT	Less than 45A
INPUT CONNECTOR	Terminal Block Type

DC OUTPUT CHARACTERISTICS

MAXIMUM POWER	710W @ -36 to -75Vdc	
EFFICIENCY	Typical 90%	
VOLTAGE	+12V	+5Vsb
MAXIMUM CURRENT	59A	4A
REGULATION	+/- 5%	+/- 5%
RIPPLE & NOISE	120mV	50mV
OUTPUT CONNECTOR	19Pairs Gold Finger	
HOLD UP TIME	PWOK 50µs at 75% of max Loading 12V 50µs at 75% of max Loading	

GENERAL SPECIFICATIONS

REMOTE MANAGEMENT	PMBus 1.1 Compatible FRU Data
MTBF	>150,000hours at 25 °C
REDUNDANCY	Hot swappable, N+1
PROTECTION	OCP, OVP, Short Circuit, Over Temperature, Input Under Voltage

REGULATORY

SAFETY COMPLIANCE	UL60950-1/CSE 60950-1 EN60950-1 IEC60950-1 CB Report CE Low Voltage Directive CCC (GB17625.1-2013)(2000m)
EMC	EMI Class A

ENVIRONMENTAL SPECIFICATIONS

AMBIENT TEMPERATURE	Operating: 0 to 50 °C Non-Operating: -10 to 60 °C
OPERATING ALTITUDE	Operating: to 3023m Non-Operating: to 10580m
RELATIVE HUMIDITY	Operating: 20% to 90% (non-condensing) Non-Operating: 5% to 95% (non-condensing)